



PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

ATTY DOCKET NO.: 5577-115
DATE: December 9, 1998



**UTILITY PATENT APPLICATION TRANSMITTAL LETTER
AND FEE TRANSMITTAL FORM (37 CFR 1.53(b))**

BOX PATENT APPLICATION
Assistant Commissioner for Patents
Washington, DC 20231

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) is:

- ☒ a patent application
☐ a Continuation ☐ a Divisional ☐ a Continuation-in-Part (CIP)
of prior application no.: ; filed
☐ A Small Entity Statement(s) was filed in the prior application; Status still proper and desired.

Inventor(s) or Application Identifier:

Binh Q. Nguyen, 305 Bebington Drive, Cary, North Carolina 27513
Sandeep Singhal, 1021-105 Brighthurst Drive, Raleigh, North Carolina 27605-1271

Entitled: **SYSTEMS, METHODS AND COMPUTER PROGRAM PRODUCTS FOR
ASSOCIATING DYNAMICALLY GENERATED WEB PAGE CONTENT
WITH WEB SITE VISITORS**

Enclosed are:

1. ☒ Application Transmittal Letter and Fee Transmittal Form (*A duplicate is enclosed for fee processing*)
2. ☒ 25 pages of Specification (including 57 claims)
3. ☒ 2 sheets of Formal Drawings (35 USC 113)
4. ☐ Oath or Declaration
 - a. ☐ newly executed (*original or copy*)
 - b. ☐ copy from prior application (37 CFR 1.63(d) (*for continuation/divisional*) [Note Box 5 Below]
 - c. ☐ DELETION OF INVENTOR(S) (*Signed statement deleting inventor(s) named in the prior application*)
5. ☐ Incorporation By Reference (*useable if box 4b is checked*)

The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (*Appendix*)
7. ☐ Assignment papers (*cover sheet(s) and document(s)*)
8. ☐ Small Entity Statement(s)
9. ☒ Information Disclosure Statement, PTO-1449, and 1 reference cited
10. ☐ Preliminary Amendment (***Please enter all claim amendments prior to calculating the filing fee.***)
11. ☐ English Translation Document
12. ☐ Certified Copy of Application No. ; Filed


13. ☐ Sequence Listing/ Sequence Listing Diskette
- a. ☐ computer readable copy
- b. ☐ paper copy
- c. ☐ statement in support
14. ☐ An Associate Power of Attorney
15. ☒ Return Receipt Postcard (MPEP 503) *(Should be specifically itemized)*
16. ☒ Other: Application Filed Under 37 CFR 1.41(c)

The fee has been calculated as shown below:

	Column 1 No. Filed	Column 2 No. Extra	Small Entity Rate Fee	Large Entity Rate Fee
BASIC FEE			\$380.00	\$760.00
TOTAL CLAIMS	57 - 20 =	37	x 09 = \$	x 18 = \$666.00
INDEP CLAIMS	9 - 3 =	6	x 39 = \$	x 78 = \$468.00
<input type="checkbox"/> MULTIPLE Dependent Claims Presented			+ 135 = \$	+ 270 = \$
<i>If the difference in Col. 1 is less than zero, Enter "0" in Col. 2</i>			Total \$	Total \$1894.00

- ☐ A check in the amount of \$ to cover the filing fee is enclosed.
- ☐ A check in the amount of \$ is enclosed to cover the filing fee, PLUS the Assignment Recordation fee (\$40.00).
- ☒ Please charge my Deposit Account No. 09-0461 in the amount of \$1894.00 to cover the filing fee.
- ☒ The Commissioner is hereby authorized to credit overpayments or charge the following fees associated with this communication to Deposit Account No. 09-0461.
- a. ☒ Additional filing fees under 37 CFR 1.16 for presentation of extra claims.
- b. ☒ Additional patent application processing fees under 37 CFR 1.17.

Respectfully submitted,


 Needham J. Boddie, II
 Registration No. 40,519


Correspondence Address:

USPTO Customer Number: **20792**
 Myers Bigel Sibley & Sajovec, P.A.
 Post Office Box 37428
 Raleigh, NC 27627
 Tel (919) 854-1400
 Fax (919) 854-1401

CERTIFICATE OF EXPRESS MAILING

"Express Mail" mailing label number EL186198495US
 Date of Deposit: December 9, 1998

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to Box Patent Applications, Assistant Commissioner for Patents, Washington, DC 20231.


 Lucille H. Gillette

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Filed: Concurrently Herewith

For: **SYSTEMS, METHODS AND COMPUTER PROGRAM PRODUCTS
FOR ASSOCIATING DYNAMICALLY GENERATED WEB PAGE
CONTENT WITH WEB SITE VISITORS**

Date: December 9, 1998


Box Patent Application
Assistant Commissioner for Patents
Washington, DC 20231

APPLICATION FILED UNDER 37 CFR 1.41(c)

Sir:

The above identified application is being filed on behalf of the inventor(s),
Binh Q. Nguyen, resident of Cary, North Carolina, and **Sandeep Singhal**, resident of
Raleigh, North Carolina, under the provisions of 37 CFR 1.41(c). A Declaration and
Power of Attorney from the inventors will follow, 37 CFR 1.63.

Respectfully submitted,




Needham J. Boddie, II
Registration No. 40,519

Myers Bigel Sibley & Sajovec
P.O. Box 37428
Raleigh, NC 27627
Tel (919) 854-1400
Fax (919) 854-1401

CERTIFICATE OF EXPRESS MAILING

"Express Mail" mailing label number EL186198495US
Date of Deposit: December 9, 1998

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post
Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to Box Patent
Applications, Assistant Commissioner for Patents, Washington, DC 20231.


Lucille H. Gillette

SYSTEMS, METHODS AND COMPUTER PROGRAM PRODUCTS FOR
ASSOCIATING DYNAMICALLY GENERATED WEB PAGE CONTENT
WITH WEB SITE VISITORS

Field of the Invention

The present invention relates generally to Web pages and, more particularly, to Web pages containing dynamically generated content.

5

Background of the Invention

The Internet is a worldwide decentralized network of computers having the ability to communicate with each other. The Internet has gained broad recognition as a viable
10 medium for communicating and interacting across multiple networks. The World Wide Web (Web) was created in the early 1990's and is comprised of server-hosting computers (Web servers) connected to the Internet that have hypertext documents or Web pages stored therewithin. Web pages are
15 accessible by client programs (i.e., Web browsers) utilizing the Hypertext Transfer Protocol (HTTP) via a Transmission Control Protocol/Internet Protocol (TCP/IP) connection between a client-hosting device and a server-hosting device. While HTTP and hypertext documents are the prevalent forms
20 for the Web, the Web itself refers to a wide range of protocols including Secure Hypertext Transfer Protocol (HTTPS), File Transfer Protocol (FTP), Gopher, and content formats including plain text, Extensible Markup Language

866027" 54640260
(XML), as well as image formats such as Graphics Interchange Format (GIF) and Joint Photographic Experts Group (JPEG).

Specific to the Web, a Web server is a computer program (housed in a computer) that serves requested Web
5 pages and files. A Web client is a requesting program associated with a user. A Web browser is an exemplary Web client for use in requesting Web pages and files from Web servers.

A Web site is conventionally a collection of Web
10 pages and files related to a particular subject that includes a beginning file called a home page. A large Web site may reside on a number of geographically-dispersed Web servers. The Web site of the International Business Machines Corporation (www.ibm.com), for example, consists of
15 thousands of Web pages and files spread out over various Web servers in locations world-wide.

As is known to those skilled in this art, a Web page is conventionally formatted via a standard page description language such as HyperText Markup Language
20 (HTML), which typically contains text and graphics references and can reference sound, animation (e.g., via programs and/or scripts), and video data. HTML provides for basic document formatting and allows a Web content provider to specify hypertext links (typically manifested as
25 highlighted text) to other Web servers and files. When a user selects a particular hypertext link, a Web browser reads and interprets an address, called a Uniform Resource Locator (URL) associated with the link, connects the Web browser with the Web server at that address, and makes an
30 HTTP request for the file identified in the link. The Web server then sends the requested file to the client in HTML format which the Web browser interprets and displays to the user.

Summary of the Invention

In view of the above discussion, it is an object of the present invention to facilitate personalized content delivery to Web site visitors.

5 It is another object of the present invention to enhance the efficacy of information delivery to Web site visitors.

 It is another object of the present invention to facilitate collecting information about the preferences of
10 Web site visitors.

 It is another object of the present invention to facilitate collecting information about dynamically generated Web content requested by Web site visitors.

 These and other objects of the present invention
15 are provided by systems, methods and computer program products for associating dynamically generated Web page content with a user who requests a Web page from a Web server. Upon receiving a user request for a Web page via a Web client in communication with the Web server, a Web
20 server records the user request within a Web server log. The requested Web page is then dynamically generated using a template for the requested Web page and one or more content objects. Exemplary content objects include, but are not limited to, text files, audio files, video files, image
25 files, and hyperlinks. Each content object has a respective unique identifier associated therewith. The stored record of the user request is then appended with each identifier for respective content objects included within the displayed Web page.

30 The present invention is advantageous because a plurality of stored user request records appended with content object identifiers, according to the present invention, can be analyzed to determine the type of content a user views as well as the time spent viewing the content.

Furthermore, the efficacy of certain content within a viewed Web page can be determined via the present invention. For example, if particular content is generally ignored by users (e.g., users do not follow hyperlinks contained within the content), a Web site owner can relocate or reformat the particular content.

The present invention stems from the realization that requests for Web pages made by a Web site visitor are conventionally accompanied by some type of user information, such as who the visitor is, the visitor's location, the type of Web browser utilized, a time stamp, and the like. This user information is conventionally stored within a Web server log file. Unfortunately, user information provided with a Web page request may not provide a Web site owner with relevant information about a visitor's preferences. Unless visitors are requested to fill out a form detailing their preferences, Web site owners typically do not have a way of gathering such information about their Web site visitors.

Brief Description of the Drawings

Fig. 1 schematically illustrates operations according to the present invention for associating dynamically generated Web page content with users requesting Web pages from a Web server.

Fig. 2 schematically illustrates a system in which the present invention can be implemented.

Detailed Description of the Invention

The present invention now is described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments

set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Like numbers refer to like elements throughout.

5 As will be appreciated by one of skill in the art, the present invention may be embodied as a method, data processing system, or computer program product. Accordingly, the present invention may take the form of an entirely hardware embodiment, an entirely software embodiment, or an
10 embodiment combining software and hardware aspects. Furthermore, the present invention may take the form of a computer program product on a computer-usable storage medium having computer-usable program code means embodied in the medium. Any suitable computer readable medium may be
15 utilized including hard disks, CD-ROMs, optical storage devices, or magnetic storage devices.

Computer program code for carrying out operations of the present invention is preferably written in an object oriented programming language such as JAVA®, Smalltalk or
20 C++. However, the computer program code for carrying out operations of the present invention may also be written in conventional procedural programming languages, such as the "C" programming language, or in a functional (or fourth generation) programming language such as Lisp, SML, or
25 Forth. The program code may execute entirely on a web server, or it may execute partly on a web server and partly on a remote computer (*i.e.*, a user's web client). In the latter scenario, the remote computer may be connected to the web server through a LAN or a WAN, or the connection may be
30 made to an external computer (for example, through the Internet using an Internet Service Provider).

The present invention is described below with reference to flowchart illustrations of methods, apparatus (systems), and computer program products according to an

embodiment of the invention. It will be understood that each block of the flowchart illustrations, and combinations of blocks in the flowchart illustrations, can be implemented by computer program instructions. These computer program
5 instructions may be provided to a processor of a general purpose computer, special purpose computer, or other programmable data processing apparatus to produce a machine, such that the instructions, which execute via the processor of the computer or other programmable data processing
10 apparatus, create means for implementing the functions specified in the flowchart block or blocks.

These computer program instructions may also be stored in a computer-readable memory that can direct a computer or other programmable data processing apparatus to
15 function in a particular manner, such that the instructions stored in the computer-readable memory produce an article of manufacture including instruction means which implement the function specified in the flowchart block or blocks.

The computer program instructions may also be
20 loaded onto a computer or other programmable data processing apparatus to cause a series of operational steps to be performed on the computer or other programmable apparatus to produce a computer implemented process such that the instructions which execute on the computer or other
25 programmable apparatus provide steps for implementing the functions specified in the flowchart block or blocks.

Referring now to **Fig. 1**, operations according to the present invention for associating dynamically generated Web page content with a user who requests a Web page from a
30 Web server are illustrated. Initially, a Web server receives a user request for a Web page via a Web client in communication with the Web server (Block 100). A record of the user's Web page request is stored within a Web server log (Block 200). This log record includes the URL of the

requested Web page, the requesting user's identity, and the time stamp of the request. The Web server then dynamically generates the requested Web page using a template and one or more content objects (Block 300). Each content object used to generate the requested Web page has a unique identifier associated therewith. The generated Web page is then served to the Web client (Block 400). The unique identifier for each content object included within the served Web page is appended to the stored user request record (Block 500). Each time a user requests additional content, the respective identifiers associated with the requested content object(s) are appended to the respective user request record, along with the time stamp of that content request. Finally, because time stamps are conventionally a part of a user request record, the time a user spends viewing particular content also can be determined. When a user requests a new Web page, the server records the time of this request with the associated request record for the user's previous Web page request. In this way, a user is assumed to have viewed content from the time it was delivered (and a corresponding entry is made to the request record) to the time that the user initiates a new Web page request (and the request time is recorded in that request record).

Stored records of user requests can be analyzed to determine user preferences with respect to Web page content (Block 600). The choices of Web pages requested by the user, combined with information about what content was presented on each requested Web page and the amount of time spent viewing that content, can provide insight into the preferences of a user. Furthermore, the efficacy of certain content within a viewed Web page can be determined via the present invention. For example, if particular content is generally ignored by users (e.g., users do not follow hyperlinks and, consequently, request corresponding Web

pages, contained within the content), a Web site owner can relocate or reformat the particular content.

Referring now to **Fig. 2**, a system within which the present invention may be implemented is schematically illustrated. A Web client **10** is in communication with a Web server **12** via a computer network, such as the Internet **14**. The Web server **12** includes a logging facility **16** for storing records of user requests for Web pages. Web server logging facilities are well understood by those skilled in this art and need not be described further herein.

The Web server **12** is configured to dynamically generate a requested Web page **30** using a template **18** and one or more Web page content objects. The template **18** defines the layout of content objects within the Web page **30** when displayed within a Web client (*i.e.*, Web browser). Each element of a Web page, including, but not limited to, divisions, sections, headings, paragraphs, images, lists, tables, and hyperlinks, may represented by a content object; in addition, a content object may include audio and video files. It is understood, however, that a single content object may represent one or more of these Web page elements. The illustrated template **18** includes a plurality of fields **17a-17e** that indicate where a respective content object is to be displayed within a generated Web page.

In the illustrated embodiment, content objects are stored within a database **19** that is accessible by the Web server **12**. However, it is to be understood that content objects **20** can be stored in a file system, as well. When a user request is received for the Web page **30**, the Web server **12** retrieves the template **18** and content objects and generates the Web page **30**. Dynamic generation of Web pages using templates and content objects is known to those skilled in this art and need not be described further herein.

Each content object 20 in the generated Web page 30 has a unique identifier (1-5) associated therewith, as illustrated. Content objects are preferably assigned a unique identifier prior to receiving a request for a Web page. This facilitates saving processor time and speed during run time when Web pages are dynamically generated. Preferably a unique identifier is generated using a hashing function. As is known by those skilled in this art, hashing is the transformation of a string of characters into a usually shorter fixed-length value or key that represents the original string. A well known hashing function that is particularly suitable for generating unique identifiers for content objects is the Message Digest 5 (MD5) hashing function. MD5 was authored by Ronald L. Rivest, Massachusetts Institute of Technology, Laboratory for Computer Science, Cambridge, MA, and is described in the Network Working Group Request for Comments 1321 (RFC 1321), Information Sciences Institute, University of Southern California, Marina del Rey, CA, April, 1992, which is incorporated herein by reference in its entirety. In alternative embodiments of the present invention, the content object's unique identifier may be formed as a URL or Uniform Resource Identifier (URI), optionally appended with additional unique identifying information.

The foregoing is illustrative of the present invention and is not to be construed as limiting thereof. Although a few exemplary embodiments of this invention have been described, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the novel teachings and advantages of this invention. Accordingly, all such modifications are intended to be included within the scope of this invention as defined in the claims. In the claims, means-plus-function clause are

intended to cover the structures described herein as
performing the recited function and not only structural
equivalents but also equivalent structures. Therefore, it is
to be understood that the foregoing is illustrative of the
5 present invention and is not to be construed as limited to
the specific embodiments disclosed, and that modifications
to the disclosed embodiments, as well as other embodiments,
are intended to be included within the scope of the appended
claims. The invention is defined by the following claims,
10 with equivalents of the claims to be included therein.

090944 120923
SECRET 5462060

4. A method according to Claim 3 wherein the content object is selected from the group consisting of text files, audio files, video files, image files, and hyperlinks.

5. A method according to Claim 1 wherein the unique identifier associated with the content object is generated by a hashing function.

6. A method according to Claim 1 further comprising the step of analyzing a plurality of stored user request records to determine Web content preferences of a user.

7. A method according to Claim 1 further comprising the step of appending the stored record of the user request with a time stamp for a subsequent user request for a Web page.

8. A method according to Claim 7 further comprising the step of determining a length of time the user views the generated Web page using time stamps within the stored record.

9. A method of associating dynamically generated Web page content with a user who requests a Web page from a Web server, wherein the user makes the Web page request via a Web client in communication with the Web
5 server, the method comprising the following steps performed by the Web server:

storing a record of the user request within a Web server log;

generating the requested Web page, wherein the
10 generated Web page includes first and second content objects having respective unique first and second identifiers associated therewith, comprising the steps of:

15 retrieving a layout template for the
 requested Web page, wherein the layout template
 defines how content objects are displayed within
 the requested Web page;
 retrieving the first and second content
 objects; and
 combining the first and second content
 20 objects and the layout template to produce the
 requested Web page;
 serving the generated Web page to the Web client;
 and
 appending the stored record of the user request
 25 with the first and second identifiers associated with the
 first and second content objects included within the
 generated Web page.

10. A method according to Claim 9 wherein the
 record of the request includes information that identifies
 the user.

11. A method according to Claim 9 wherein the
 first and second content objects are selected from the group
 consisting of text files, audio files, video files, image
 files, and hyperlinks.

12. A method according to Claim 9 further
 comprising the step of analyzing a plurality of stored user
 request records to determine Web content preferences of a
 user.

13. A method of collecting information about the
 preferences of Web site visitors comprising the step of:
 associating dynamically generated Web page
 content with a user who requests a Web page from a Web
 5 server via a Web client in communication with the Web
 server.

14. A method according to Claim 13, wherein the step of associating dynamically generated Web page content with a user comprises the following steps performed by the Web server:

- 5 storing a record of the user request within a Web server log;
- generating the requested Web page, wherein the generated Web page includes a content object having a unique identifier associated therewith;
- 10 serving the generated Web page to the Web client;
- and
- appending the stored record of the user request with the unique identifier associated with the content object included within the generated Web page.

15. A method according to Claim 13 wherein the record of the request includes information that identifies the user.

16. A method according to Claim 13 wherein the step of generating the requested Web page comprises the steps of:

- retrieving a layout template for the requested
- 5 Web page, wherein the layout template defines how content objects are displayed within the requested Web page;
- retrieving the content object; and
- combining the content object and the layout template to produce the requested Web page.

17. A method according to Claim 16 wherein the content object is selected from the group consisting of text files, audio files, video files, image files, and hyperlinks.

18. A method according to Claim 13 wherein the

unique identifier associated with the content object is generated by a hashing function.

19. A method according to Claim 13 further comprising the step of analyzing a plurality of stored user request records to determine Web content preferences of a user.

20. A system for associating dynamically generated Web page content with a user who requests a Web page from a Web server, wherein the user makes the Web page request via a Web client in communication with the Web server, comprising:

means for storing a record of the user request within a Web server log;

means for generating the requested Web page, wherein the generated Web page includes a content object having a unique identifier associated therewith;

means for serving the generated Web page to the Web client; and

means for appending the stored record of the user request with the unique identifier associated with the content object included within the generated Web page.

21. A system according to Claim 20 wherein the record of the request includes information that identifies the user.

22. A system according to Claim 20 wherein the means for generating the requested Web page comprises:

means for retrieving a layout template for the requested Web page, wherein the layout template defines how content objects are displayed within the requested Web page;

means for retrieving the content object; and

means for combining the content object and the layout template to produce the requested Web page.

23. A system according to Claim 22 wherein the content object is selected from the group consisting of text files, audio files, video files, image files, and hyperlinks.

24. A system according to Claim 20 wherein the unique identifier associated with the content object is generated by a hashing function.

25. A system according to Claim 20 further comprising means for analyzing a plurality of stored user request records to determine Web content preferences of a user.

26. A system according to Claim 20 further comprising means for appending the stored record of the user request with a time stamp for a subsequent user request for a Web page.

27. A system according to Claim 26 further comprising means for determining a length of time the user views the generated Web page using time stamps within the stored record.

28. A system for associating dynamically generated Web page content with a user who requests a Web page from a Web server, wherein the user makes the Web page request via a Web client in communication with the Web server, comprising:

means for storing a record of the user request within a Web server log;

means for generating the requested Web page, wherein the generated Web page includes first and second content objects having respective unique first and second identifiers associated therewith, comprising:

means for retrieving a layout template for the requested Web page, wherein the layout template defines how content objects are displayed within the requested Web page;

15

means for retrieving the first and second content objects; and

means for combining the first and second content objects and the layout template to produce the requested Web page;

20

means for serving the generated Web page to the Web client; and

means for appending the stored record of the user request with the first and second identifiers associated with the first and second content objects included within the generated Web page.

25

29. A system according to Claim 28 wherein the record of the request includes information that identifies the user.

30. A system according to Claim 28 wherein the first and second content objects are selected from the group consisting of text files, audio files, video files, image files, and hyperlinks.

31. A system according to Claim 28 further comprising means for analyzing a plurality of stored user request records to determine Web content preferences of a user.

32. A system for collecting information about the preferences of Web site visitors comprising:

means for associating dynamically generated Web page content with a user who requests a Web page from a Web server via a Web client in communication with the Web server.

5

33. A system according to Claim 32, wherein the means for associating dynamically generated Web page content with a user comprises:

means for storing a record of the user request
5 within a Web server log;

means for generating the requested Web page,
wherein the generated Web page includes a content object
having a unique identifier associated therewith;

means for serving the generated Web page to the
10 Web client; and

means for appending the stored record of the user
request with the unique identifier associated with the
content object included within the generated Web page.

34. A system according to Claim 32 wherein the record of the request includes information that identifies the user.

35. A system according to Claim 32 wherein the means for generating the requested Web page comprises:

means for retrieving a layout template for the
requested Web page, wherein the layout template defines how
5 content objects are displayed within the requested Web page;

means for retrieving the content object; and

means for combining the content object and the
layout template to produce the requested Web page.

36. A system according to Claim 35 wherein the content object is selected from the group consisting of text files, audio files, video files, image files, and hyperlinks.

37. A system according to Claim 32 wherein the unique identifier associated with the content object is generated by a hashing function.

38. A system according to Claim 32 further comprising means for analyzing a plurality of stored user request records to determine Web content preferences of a user.

39. A computer program product for associating dynamically generated Web page content with a user who requests a Web page from a Web server, wherein the user makes the Web page request via a Web client in communication
5 with the Web server, the computer program product comprising a computer usable storage medium having computer readable program code means embodied in the medium, the computer readable program code means comprising:

computer readable program code means for storing
10 a record of the user request within a Web server log;

computer readable program code means for generating the requested Web page, wherein the generated Web page includes a content object having a unique identifier associated therewith;

15 computer readable program code means for serving the generated Web page to the Web client; and

computer readable program code means for appending the stored record of the user request with the unique identifier associated with the content object
20 included within the generated Web page.

40. A computer program product according to Claim 39 wherein the record of the request includes information that identifies the user.

41. A computer program product according to Claim 39 wherein the computer readable program code means for generating the requested Web page comprises:

computer readable program code means for
5 retrieving a layout template for the requested Web page,

wherein the layout template defines how content objects are displayed within the requested Web page;

computer readable program code means for retrieving the content object; and

10 computer readable program code means for combining the content object and the layout template to produce the requested Web page.

42. A computer program product according to Claim 41 wherein the content object is selected from the group consisting of text files, audio files, video files, image files, and hyperlinks.

43. A computer program product according to Claim 39 wherein the unique identifier associated with the content object is generated by a hashing function.

44. A computer program product according to Claim 39 further comprising computer readable program code means for analyzing a plurality of stored user request records to determine Web content preferences of a user.

45. A computer program product according to Claim 39 further comprising computer readable program code means for appending the stored record of the user request with a time stamp for a subsequent user request for a Web
5 page.

46. A computer program product according to Claim 45 further comprising computer readable program code means for determining a length of time the user views the generated Web page using time stamps within the stored
5 record.

47. A computer program product for associating dynamically generated Web page content with a user who

requests a Web page from a Web server, wherein the user
makes the Web page request via a Web client in communication
5 with the Web server, the computer program product comprising
a computer usable storage medium having computer readable
program code means embodied in the medium, the computer
readable program code means comprising:

computer readable program code means for storing
10 a record of the user request within a Web server log;

computer readable program code means for
generating the requested Web page, wherein the generated Web
page includes first and second content objects having
respective unique first and second identifiers associated
15 therewith, comprising:

computer readable program code means for
retrieving a layout template for the requested
Web page, wherein the layout template defines how
content objects are displayed within the
20 requested Web page;

computer readable program code means for
retrieving the first and second content objects;
and

computer readable program code means for
25 combining the first and second content objects
and the layout template to produce the requested
Web page;

computer readable program code means for serving
the generated Web page to the Web client; and

30 computer readable program code means for
appending the stored record of the user request with the
first and second identifiers associated with the first and
second content objects included within the generated Web
page.

48. A computer program product according to Claim 47 wherein the record of the request includes information that identifies the user.

49. A computer program product according to Claim 47 wherein the first and second content objects are selected from the group consisting of text files, audio files, video files, image files, and hyperlinks.

50. A computer program product according to Claim 47 further comprising computer readable program code means for analyzing a plurality of stored user request records to determine Web content preferences of a user.

51. A computer program product for collecting information about the preferences of Web site visitors, the computer program product comprising a computer usable storage medium having computer readable program code means embodied in the medium, the computer readable program code means comprising:

computer readable program code means for associating dynamically generated Web page content with a user who requests a Web page from a Web server via a Web client in communication with the Web server.

52. A computer program product according to Claim 51, wherein the computer readable program code means for associating dynamically generated Web page content with a user comprises:

computer readable program code means for storing a record of the user request within a Web server log;

computer readable program code means for generating the requested Web page, wherein the generated Web page includes a content object having a unique identifier associated therewith;

computer readable program code means for serving the generated Web page to the Web client; and

computer readable program code means for appending the stored record of the user request with the
15 unique identifier associated with the content object included within the generated Web page.

53. A computer program product according to Claim 51 wherein the record of the request includes information that identifies the user.

54. A computer program product according to Claim 51 wherein the computer readable program code means for generating the requested Web page comprises:

computer readable program code means for
5 retrieving a layout template for the requested Web page, wherein the layout template defines how content objects are displayed within the requested Web page;

computer readable program code means for retrieving the content object; and

10 computer readable program code means for combining the content object and the layout template to produce the requested Web page.

55. A computer program product according to Claim 54 wherein the content object is selected from the group consisting of text files, audio files, video files, image files, and hyperlinks.

56. A computer program product according to Claim 51 wherein the unique identifier associated with the content object is generated by a hashing function.

57. A computer program product according to Claim 51 further comprising computer readable program code means for analyzing a plurality of stored user request records to determine Web content preferences of a user.

SYSTEMS, METHODS AND COMPUTER PROGRAM PRODUCTS FOR
ASSOCIATING DYNAMICALLY GENERATED WEB PAGE CONTENT
WITH WEB SITE VISITORS

Abstract of the Disclosure

Systems, methods and computer program products are provided for associating dynamically generated Web page content with a user who requests a Web page from a Web server. Upon receiving a user request for a Web page via a Web client in communication with the Web server, a Web server records the user request within a Web server log. The requested Web page is then dynamically generated using a template for the requested Web page and one or more content objects having respective unique identifiers associated therewith. The stored record of the user request is then appended with each identifier for respective content objects included within the displayed Web page.

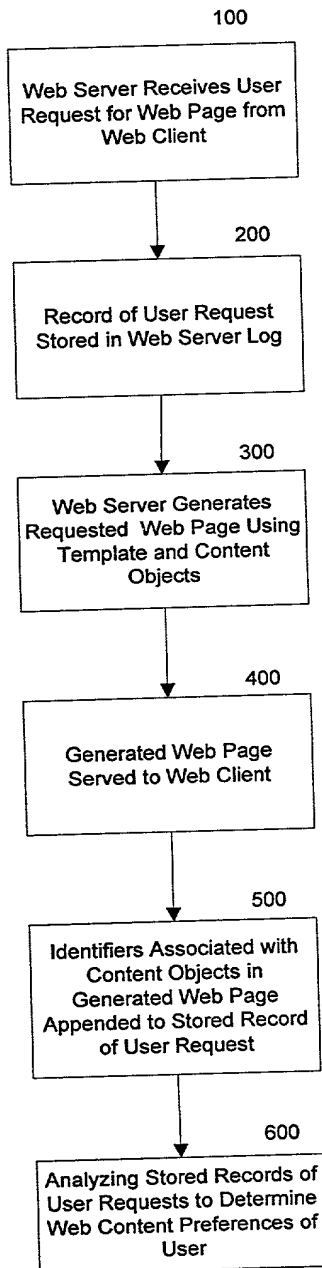


Fig. 1

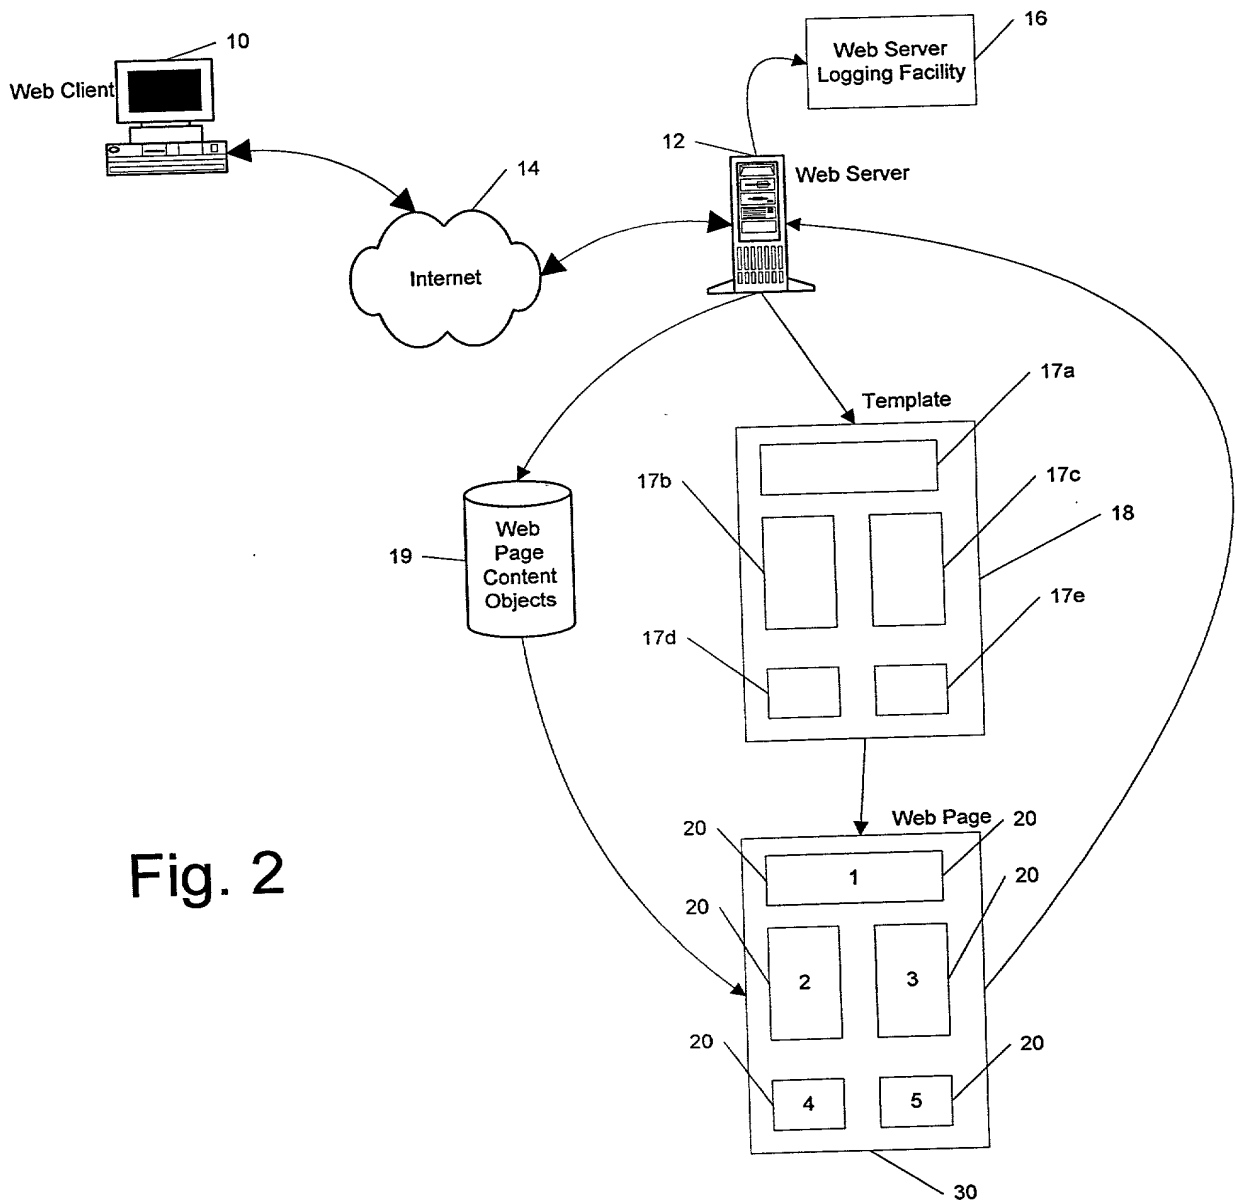


Fig. 2